

High Rejection

Brackish Water Reverse Osmosis (RO) Element

LG BW 400 R+



Overview

LG NanoH₂O's brackish water RO membranes lower water treatment costs by improving energy efficiency and productivity. These thin-film nanocomposite (TFN) membranes feature benign nanomaterials incorporated into the thin-film polyamide layer of a composite membrane. This innovative patented and patent-pending technology significantly increases membrane permeability while offering superior salt rejection.

- Higher than industry-standard salt rejection
- Best-in-class flux
- Well suited for high quality permeate requirements or second-pass systems

NEW Anti-telescoping device with raised lip and bi-directional seal for easy element loading and removal




Product Specifications

Configuration: 8-inch spiral wound
 Membrane Polymer: Thin-film nanocomposite (TFN) polyamide

Product Number	Permeate flow rate m ³ /d (gpd)	Minimum NaCl Rejection %	Stabilized NaCl Rejection %	Active Membrane Area m ² (ft ²)	Feed Spacer mil
LG BW 400 R+	45 (12,000)	99.6	99.75	37 (400)	34

Note: The above values are normalized to the following conditions: 2,000 ppm NaCl, 15.5 bar (225 psi), 25°C (77°F), pH 8, 15% recovery. Permeate flows for individual elements may vary +/- 15%.

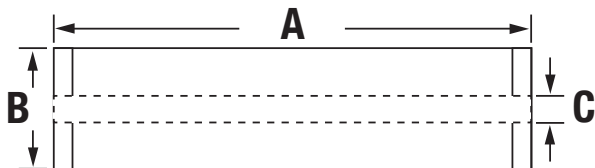

Part Number	Length A	Element O.D. B	Perm Tube I.D. C	Weight kg (lbs.)
LG BW 400 R+	1016 mm (40 in.)	200 mm (7.9 in.)	28.6 mm (1.125 in.)	16.4 (36)

Operating Specifications

For more information and operating guidelines, visit www.lg-nanoh2o.com

Max. Operating Pressure:	41 bar (600 psig)
Max. Chlorine Concentration:	< 0.1 ppm
Max. Operating Temperature:	45°C (113°F)
pH Range, Continuous (Cleaning):	2-11 (2-12)
Max. Feedwater Turbidity:	1.0 NTU
Max. Feedwater SDI (15 mins):	5.0
Max. Feed Flow:	19 m ³ /h (85 GPM)
Max. Pressure Drop:	1.0 bar (15 psig)

The information and data contained herein are deemed to be accurate and reliable and are offered in good faith, but without guarantee of performance. LG NanoH₂O assumes no liability for results obtained or damages incurred through the application of the information contained herein. Customer is responsible for determining whether the products and information presented herein are appropriate for the customer's use and for ensuring that customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Specifications subject to change without notice. LG NanoH₂O is a wholly owned company of LG Chem, Ltd. All rights reserved. © 2015 LG NanoH₂O, Inc.



LG NanoH₂O, Inc. • 750 Lairport Street, El Segundo, CA 90245 USA
 Tel: +1 424.218.4000 • Fax: +1 424.218.4001 • www.lg-nanoh2o.com