

High Rejection

Seawater Reverse Osmosis (RO) Element

LG SW 400 R



Overview

LG NanoH₂O's thin-film nanocomposite (TFN) membranes lower water treatment costs by improving energy efficiency and productivity. These membranes feature benign nanomaterials incorporated into the thin-film polyamide layer of a composite membrane. This innovative patent-pending technology significantly increases membrane permeability.

- Industry-standard flux with highest salt rejection
- Standard 8-inch spiral wound element design
- Easy to retrofit existing RO plants
- NSF Standard 61 Certified

NEW Anti-telescoping device with raised lip and bi-directional seal for easy element loading and removal




Product Specifications

Configuration: 8-inch spiral wound
 Membrane Polymer: Thin-film nanocomposite (TFN) polyamide

| Product Number | Permeate flow rate m ³ /d (gpd) | Minimum NaCl Rejection % | Stabilized NaCl Rejection % | Active Membrane Area m ² (ft ²) | Feed Spacer mil | Stabilized Boron Rejection % |
|----------------|---|--------------------------|-----------------------------|---|-----------------|------------------------------|
| LG SW 400 R | 34 (9,000) | 99.7 | 99.85 | 37 (400) | 28 | 93 |

Note: The above values are normalized to the following conditions: 32,000 ppm NaCl, 5 ppm boron, 5.5 MPa (800 psi), 25°C (77°F), pH 8, 8% recovery. Permeate flows for individual elements may vary +/- 15%.

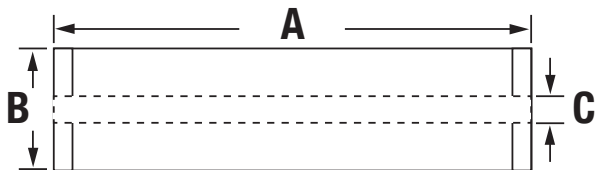

| Part Number | Length A | Element O.D. B | Perm Tube I.D. C | Weight kg (lbs.) |
|-------------|-------------------|------------------|---------------------|------------------|
| LG SW 400 R | 1,016 mm (40 in.) | 200 mm (7.9 in.) | 28.6 mm (1.125 in.) | 16.4 (36) |

Operating Specifications

For more information and operating guidelines, visit www.lg-nanoh2o.com

| | |
|---|---------------------------------|
| Max. Applied Pressure: | 8.27 MPa (1200 psig) |
| Max. Chlorine Concentration: | < 0.1 ppm |
| Max. Operating Temperature: | 45°C (113°F) |
| pH Range, Continuous (Cleaning): | 2-11 (2-13) |
| Max. Feedwater Turbidity: | 1.0 NTU |
| Max. Feedwater SDI (15 mins): | 5.0 |
| Max. Feed Flow: | 17.0 m ³ /h (75 GPM) |
| Min. Ratio of Concentrate to Permeate Flow for any Element: | 5:1 |
| Max. Pressure Drop (ΔP) for Each Element: | 0.7 bar (10 psi) |

The information and data contained herein are deemed to be accurate and reliable and are offered in good faith, but without guarantee of performance. LG NanoH₂O assumes no liability for results obtained or damages incurred through the application of the information contained herein. Customer is responsible for determining whether the products and information presented herein are appropriate for the customer's use and for ensuring that customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Specifications subject to change without notice. LG NanoH₂O is a wholly owned company of LG Chem, Ltd. All rights reserved. © 2015 LG NanoH₂O, Inc.



LG NanoH₂O, Inc. • 750 Lairport Street, El Segundo, CA 90245 USA
 Tel: +1 424.218.4000 • Fax: +1 424.218.4001 • www.lg-nanoh2o.com

Rev. F (01.15)